

**傳動系列**  
Face driving center


**替換式端面固定**  
Interchangeable driving head type

## > SC-67-B-30 SERIES

### 齒部替換式端面固定傳動頂針

#### CHANGEABLE CENTER CONE FACE DIVER


- ◎ **適用:** CNC車床、高速車床、自動送料專用機、滾齒機及其他機床。  
Application CNC lathe and high speed lathe and auto feeder and gear hobbing machine or other machine tool.
- ◎ **特點:** 使用本固定傳動插式頂針可正、反轉車削，使用前須先車削工件端面，才可使用於CNC車床及其他機床，可前後同步車削工件一次加工完成。本頂針特點：頭部可更換多種尺寸，降低成本，使用方便。  
Characteristics Need turning the workpiece face before using this center, and turning and reversing lathing process is OK. suitable for front and rear synchronous and one time finishing turning process. the center cone can be changed to different size, easy operation and cost down.

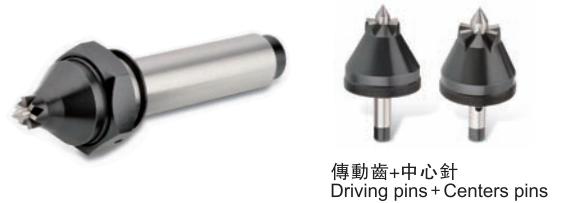

傳動齒+中心針  
Driving pins + Centers pins

- ◎ **注意:** 本替換式端面固定齒插式傳動頂針，靠尾座足夠壓力，即可傳動車削使用，尾座壓力越高，傳動力越大。  
Note Face driving by the enough pressure from the tailstock, stonger pressure, stronger driving force.

- ◎ **配件:** 標準組配件: Standard accessories  
Accessories SC-67-0616 SC-67-0820 SC-67-1025

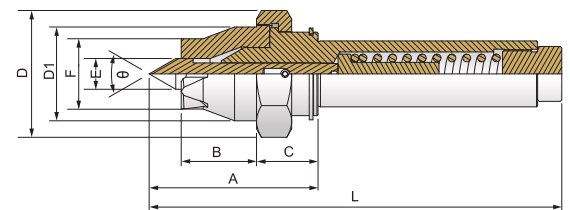

規格 / Specification 單位/UNIT: mm

精準度:<0.005

型式/外表尺寸 Model/Spec	A	B	C	D	D1	E	F	L
SC-67-B-0408	68.3	34.3	28	57	42.8	4	8	179.3
SC-67-B-0510	68.3	34.3	28	57	42.8	5	10	179.3
SC-67-B-0612	70.3	34.3	28	57	42.8	6	12	181.3
SC-67-B-0616	70.3	34.3	28	57	42.8	6	16	181.3
SC-67-B-0820	70.3	34.3	28	57	42.8	8	20	181.3
SC-67-B-1025	73.9	34.3	28	57	42.8	10	25	184.9
SC-67-B-1225	76.9	34.3	28	57	42.8	12	25	187.9
SC-67-B-1432	76.9	34.3	28	57	42.8	14	32	187.9

## > TSC-285-4A SERIES

### 回轉型端面傳動頂針

#### FACE DRIVER LIVE CENTER

- ◎ 用于機床尾座
- ◎ 頂緊工件後，配合主軸端傳動頂尖轉動工件，防止在重切削作業時工件打滑。  
it's used on CNC machine's tailstock  
It can avoid the workpiece from slipping when heavy duty machining process.

